

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)

Docket No.
71493-855

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

CC BEAUDOIN

METHOD OF DISPLAYING NODES AND LINKS

Enclosed are:

- ☐ Certificate of Mailing with Express Mail Mailing Label No.
- ☒ 11 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **AR Card, Assignment**

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	75	- 20 =	55	x \$18.00	\$990.00
Indep. Claims	2	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
TOTAL FILING FEE					\$1,680.00

- ☒ A check in the amount of **\$1,720.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-2550** as described below. A duplicate copy of this sheet is enclosed.
 - ☐ Charge the amount of as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **July 27, 2000**

Kohji Suzuki
Reg. No. 44467

Signature



07380

PATENT TRADEMARK OFFICE

* includes \$40.00 assignment recordal fee
cc:

METHOD OF DISPLAYING NODES AND LINKS**FIELD OF THE INVENTION**

The invention relates to connected graphs, and in particular, to an improved method of displaying nodes, and
5 links between nodes.

BACKGROUND OF THE INVENTION

A connected graph is any means of displaying a number of nodes (typically represented by points), and links (typically represented by lines between such points) connecting
10 such nodes. Such connected graphs are used in mathematics to represent theoretical or real scenarios involving multiple nodes and the interconnections between them. In commercial applications, such graphs are used in industries such as the transportation industry to show transportation connections
15 between cities, or subway stations for example, or in the telecommunications industry to display communication links between communication nodes.

In typical connected graphs, the nodes are positioned geographically or logically, such that the position of such
20 nodes provides some information to the viewer of the connected graph. An example of such a connected graph for either a transportation or telecommunication network is shown in Figure 1. In this example, the nodes are displayed in a pseudo-geographical organization to communicate the relative location
25 of each set of nodes. This method of displaying nodes and links is suitable where the number of nodes is relatively low, and the interconnections between the nodes are simple, such that there are only a few links connecting the nodes. However, where there are either a large number of nodes, a large number
30 of interconnections between the nodes, or some combination thereof, such a connected graph can become extremely complex such that it becomes impossible for the viewer to extract any

useful information from it. An example of such a complex connected graph is shown in Figure 2. The representation of the links connecting the nodes become so dense that it forms a tight mesh, making it very difficult for the viewer to tell which links connect which nodes. This problem is very common in telecommunication applications where there can be dozens or even hundreds of highly interconnected nodes in a given network.

Several efforts have been made at solving the problem of complex connected graphs. Basic solutions include using different colours and/or line thicknesses for different links. In other efforts, the geographical or logical placement of the nodes is abandoned in favour of reducing the complexity of the connected graph. In such examples, the nodes may be arranged in a circle with links between the nodes forming arcs across the circle. Alternatively, the nodes and links may be represented in a three-dimensional fashion. Other solutions include methods of viewing portions of complex connected graphs with greater clarity. For example, a "visual fish eye" or virtual magnifying glass may be used to expand a portion of the graph for easier viewing. However, these efforts provide only partial solutions since again, as the number of nodes and the interconnections between them increases, the graphs become increasingly complex such that extracting any information from them becomes extremely difficult.

A further problem adding to the complexity of such graphs is introduced by telecommunication applications in which there are often several communication links between any two nodes. For example, a single fibre-optic bundle connecting two nodes may contain hundreds of individual cables, each of which must be represented on the connected graph.

Additionally, it is often desirable in real-world applications of connected graphs to visually provide some

information about the links. For example, it may be desirable to communicate the status of a communication link, or the frequency of flights for an air link. Such information may be provided by using different colours, or different link representations (dashed lines, for example). However, such information is lost when the connected graph becomes complex.

SUMMARY OF THE INVENTION

In a broad aspect, the present invention provides a method, optionally in a computer system, for displaying representations of nodes, and links connecting the nodes. In this method, a node line is displayed representing each one of the nodes, the node lines being parallel to one another. Further, a link line is displayed representing each one of the links, the link lines being perpendicular to the node lines. Each link line terminates at two node lines, these two node lines representing the nodes connected by the link represented by the link line.

In other aspects, the present invention contemplates the above method being used to display nodes and links in a telecommunication network, the link lines visually communicating link attributes of each link, the link lines being ordered or grouped according to a selected link attribute identifier, performance bars being displayed in association with each link line, and a time selector being displayed for selection of the time at which the link information is to be displayed.

The present invention also contemplates a graphical user interface adapted to implement the above method, a computer system adapted to implement the above method, and a computer readable medium having stored thereon instructions for instructing a computer to implement the above method.

The present invention also contemplates a printed

medium having printed thereon a visual representation of nodes, and links connecting said nodes. This visual representation includes a node line representing each one of the nodes, each node line being parallel to every other node line, and a link
5 line representing each one of the links, each link line being perpendicular to each node line. Each link line terminates at two node lines, these two node lines representing the nodes connected by the link represented by the link line.

Advantageously, in representing the nodes as a series
10 of parallel lines instead of points, the present invention provides a method of representing nodes and links in a clear, uncluttered manner. Furthermore, in applying the method of the present invention, the complexity of the representation does not increase as more nodes and links are added. Additionally,
15 owing to the reduced complexity, the present method makes it possible for the representation to clearly communicate information about a link represented by a link line, by displaying the link line in a visually distinctive manner.

BRIEF DESCRIPTION OF THE DRAWINGS

20 Preferred embodiments of the invention will now be described with reference to the attached drawings in which:

Figure 1 is an example of a typical connected graph representing either transportation or telecommunication links between nodes throughout the United States, grouped by
25 geographic region;

Figure 2 is an example of a complex connected graph;

Figure 3 is a block diagram of a computer system for implementing a method in accordance with an embodiment of the present invention;

Figure 4 is a flow chart describing a method in accordance with an embodiment of the present invention;

Figure 5 is a connected graph having node lines representing nodes and link lines representing links, created
5 using the method described in Figure 4;

Figure 6 is a graphical user interface implementing a method in accordance with another embodiment of the present invention;

Figure 6a is the graphical user interface of Figure 6
10 in which link lines have been grouped into link groupings;

Figure 6b is the graphical user interface of Figure 6a in which one of the link groupings has been compressed to be represented by a compressed link line;

Figure 6c is the graphical user interface of Figure 6b in which node lines and associated node indicia have been
15 grouped into node groupings;

Figure 6d is the graphical user interface of Figure 6c in which one of the node groupings has been compressed to be represented by a compressed node line;

Figure 7a is the connected graph of Figure 5 in which
20 a thickness of each link line is a function of a level of traffic on the link it represents;

Figure 7b is the connected graph of Figure 5 in which
25 a direction of data travel on each link is communicated by the placement of an arrowhead at one end of each link line.

Figure 7c is the connected graph of Figure 5 in which two attributes of the link represented by each link line are communicated through hatching.

Figure 8 is a flow chart describing how the graphical user interface of Figure 6 changes upon selection of a different display criteria by a user.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Figure 3 is a block diagram of a basic computer system suitable for implementing an embodiment of a method of the present invention. Node and link data 10, including such information as an identification of each node and link, as well as the nodes connected by each link, is stored in a memory storage device 11. When called upon to do so by a user, a processor 12 retrieves the node and link data 10 from the memory storage device 11, processes it as required, and displays the data on a display 13 in accordance with the present invention.

10 In Figure 4, a flow chart for the implementation of an embodiment of a method of the present invention is shown. Figure 5 shows a simple connected graph 14 created using the method described in the flow chart of Figure 4.

15 In a first step 15, the processor 12 retrieves the node and link data 10 from the memory storage device 11. In a second step 16, the processor 12 processes this information as required, for example, determining the location each element is to be displayed. Further processing may also be performed at this stage as described for other embodiments below, for example sorting the link data 10 according to some sort criterion.

20 In a third step 17, the processor displays a number of parallel nodes lines 19 on the display 13, each of the node lines 19 representing a node. These nodes may be identified by node indicia 20 located at the base of each of the node lines 19.

In a fourth step 18, link lines 21 are displayed extending between, and perpendicular to the node lines 19. These link lines 21 represent links between the nodes. Each of the link lines 21 which represents a particular link,
5 terminates at the two node lines 19 representing the nodes connected by that link.

In transportation applications, the node lines 19 may represent cities, airports or subway stations for example, with the link lines 21 representing air routes, or subway routes.

10 In telecommunication applications, the node lines 19 may represent routers, satellites or cellular base stations for example, with the link lines 21 representing fiber-optic cables between routers or air-links between satellites and base stations.

15 A more sophisticated embodiment of the present invention will now be described with reference to Figure 6.

Figure 6 is a graphical user interface 22 created using a method in accordance with an embodiment of the present invention, which displays a connected graph in which the links
20 between nodes in a telecommunication network are displayed. The context of such a graphical user interface, and the manner in which node and link information 10 may be collected and stored in the memory storage device 11 has recently been discussed in U.S. Patent Application No. 09/345,471, "Multi-
25 panel Route Monitoring Graphical User Interface, System and Method", Rochford, et al., assigned to the assignee of the present application, and incorporated herein in its entirety. For use in creating the graphical user interface 22 displayed in Figure 6, the node and link information 10 includes, an
30 identification of the nodes in the network, an identification of the links in the network and the nodes each link connects, as well as link attributes and performance characteristics for each link as a function of time.

In the example displayed in Figure 6, the name of the network for which nodes and links are displayed, is "ABC Company Continental U.S. Intranet" 23.

The nodes which are represented in this graphical user interface are identified by node indicia 24. In this example, the nodes are simply identified by alphabetical identifiers. However, they may instead be identified by other identifiers, geographical identifiers, router numbers, or distinctive icons, for example.

Projecting upward from each of these node indicia 24 are node lines 26 which represent the nodes themselves. These node lines 26 are parallel to one another.

Extending between these node lines 26 are link lines 28 which represent the links between the nodes. Each one of the link lines 28 terminates at the two node lines 26 representing the nodes connected by the link. In this example, each of the link lines 28 is displayed using a particular shading or hatching to communicate a status of the link represented by the link line. In this case, a link line with no shading 28a indicates "ok", a link line with single hatching 28b indicates "trouble protected", a solid link line 28c indicates "trouble unprotected", while a double hatched link line 28d indicates "critical event". Of course, a legend may be provided in the graphical user interface 22. Although the shading and hatching of each one of the link lines 28 in this example communicates the status of the link it represents, the shading and hatching may be used to communicate other attributes of the link, geographic location for example. Further, although not displayed in this example, the link lines 28 may communicate attributes of the link it represents, in other ways. For example, the thickness of each of the link lines 28 may be varied to be a function of the traffic level on the link it represents, as shown in the simple example of

Figure 7a. Alternatively, in the case of unidirectional links, an arrowhead at an end of each of the link lines 28 may be used to communicate the direction of travel of data on the link it represents, as shown in the simple example of Figure 7b.

- 5 Further, each of the link lines 28 may be separated into an upper and lower half such that each half may communicate different attributes of the link it represents, as shown in the simple example of Figure 7c. Additionally, instead of shading, different colours may be used to indicate a status of a link.
- 10 Or, instead of hatching, other patterning may be used, striping or checking, for example.

In the example displayed in Figure 6, the network contains a larger number of nodes and links than can be displayed, only a portion of which may be displayed using node lines 26 and link lines 28 at any given time. Accordingly, a horizontal scroll bar 30 and a vertical scroll bar 32 are provided such that the user may view information for nodes and links for which representations are not presently displayed.

15

To the left of the node lines 26 are displayed performance bars 34. Each of these performance bars 34 is associated with, and is on the same horizontal level with one of the link lines 28, and is used to communicate performance information about the link represented by the link line. This information is communicated by the length of each of the performance bars 34. A performance selector 36 is provided for selecting between various performance characteristic identifiers. The length of each of the performance bars 34 is a function of the value of the performance characteristic identified in the performance selector 36 appearing above the performance bars 34, for the link associated with the performance bar. In this case, the performance bars 34 communicate the error rate of each link, namely the average number of errors occurring on the link per unit of time. The performance characteristic communicated by the performance bars

20

25

30

34 may be changed using a pull-down menu (not shown) associated with the performance selector 36. Possible alternative performance characteristics may include "lost packets" (the average number of packets sent but not delivered across the link, per unit of time), "latency" (the average amount of time required to deliver data across the link), "density" (the average amount of data delivered across the link per unit of time), and "quality of service" (the level of service to be accorded to the link). Although in this example each of the performance bars 34 communicates a performance characteristic of the link represented by the link line with which it is associated, these performance bars 34 may alternatively communicate other quantitative characteristics of the link, the number of users on the link, for example.

The vertical positioning of each of the link lines 28 may be altered using a link sort-on selector 38. The link sort-on selector 38 allows the user to select the link attribute used to determine the position of each of the link lines 28, using a pull-down menu (not shown) associated with the link sort-on selector 38, said pull-down menu displaying a plurality of link attribute identifiers (not shown). In the displayed example, "performance" has been selected on the link sort-on selector 38, such that the link lines 28 are sorted in order of the performance characteristic selected in the performance selector 36, in this case "error rate". Thus, the link lines 28 appear from top to bottom from those representing links having the lowest error rate, to those representing links having the highest error rate. Other link attributes on which the link lines 28 may be ordered include "link speed", "link region", "priority level of the link", "link capacity", "link status" ("ok", "troubled protected", etc.), "start node" in which those link lines representing links starting from a selected node are grouped together (placed in proximity to one another), and "end node" in which those link lines representing

links ending at a selected node are grouped together. Of course, other link attributes may be used for sorting or grouping the link lines 28.

Optionally, the link lines 28 may be vertically positioned into groups comprising link lines 28 representing links having similar link attributes. Such an option may be selected, for example by selecting the option on a pop-up menu (not shown) which is displayed when the user right-clicks on a mouse. Alternatively, the graphical user interface 22 may group the link lines by default. The link attribute used to place the link lines 28 into groups may be selected using the link sort-on selector 38.

In Figure 6a, the user has selected for the links to be displayed in groups, and "link region" has been selected in the link sort-on selector 38. Accordingly, the link lines 28 have been grouped according to the geographic region in which each of the links represented by the link lines 28 is located. In this case, the link groupings 50 have been identified by placing a box around each link grouping 50, and have also been separated from one another spatially. Of course, other means may be used to identify link groupings 50, background shading, for example. Additionally, each link grouping 50 may be identified by displaying an alphanumeric identification associated with each link grouping 50, for example "California" 53.

Alternatively, the user may select the link lines to be grouped by selecting them, for example, by clicking on the link lines with a mouse, and then selecting for the selected link lines to be grouped.

Optionally, a link grouping may be compressed by the user. In Figure 6b, a particular link grouping 51 appearing in Figure 6a has been selected, for example by the user

positioning a mouse pointer (not shown) over the link grouping 51 and clicking the right mouse button, which may cause a pop-up menu to appear (not shown) allowing the user to select "compress" (this option may not be available with respect to all link groupings 50, in which case the "compress" option in the pop-up menu will appear in ghosting instead of in solid lettering). As a result, the link grouping has been compressed to a single compressed link line 52. This compressed link line 52 is visually distinguished from the others, in this case by hatching the background behind the compressed link line and its associated performance bar 34. Such link groupings 50 may be compressed, for example, to represent a number of optical fibers in a fiber optic cable, as a single link. When compressed, the performance characteristic value and the link attribute associated with this compressed link line 52 is the average of the performance characteristic values, or the predominant link attribute, of the links represented by the compressed link line 52. Selecting the compressed link line 52 expands the compressed link line to the link grouping 51 of Figure 6a. Again, such selection may be effected, for example, by positioning a mouse pointer (not shown) over the compressed link line 52 and clicking the right mouse button, which may cause a pop-up menu to appear (not shown) allowing the user to select "expand".

Within each link grouping 50, the link lines 28 may be ordered based on the link attribute upon which the link groupings are based. For example, (not illustrated) if the link attribute upon which the link groupings 50 are based is "priority level", the link lines 28 may be grouped according to the bands of priority levels of the links they represent. Thus, one link grouping 50 may contain those link lines representing links having priority levels 1 through 10, and the next link grouping 50 may contain those link lines representing links having priority levels 11 through 20. In such a case,

within each link grouping 50 the link lines will be ordered according to the priority level of the links they represent.

Furthermore, within each link grouping 50, the link lines 28 may be vertically positioned relative to one another based on a secondary link attribute. Such secondary link attribute may be selected using another pull-down menu (not shown), for example, or may be predetermined. Thus, if for example, the link attribute upon which the link groupings 50 are based is "link status", the link lines 28 will be vertically positioned into link groupings 50 consisting of link lines 28 representing links having similar link status. Then, if the secondary link attribute upon which the vertical position of the link lines 28 is determined is "link speed", those link lines 28 comprising each link grouping 50 will be vertically ordered according to the link speeds of the links they represent.

Similarly, although not shown, the horizontal positioning of each of the node lines 26 and their associated node indicia 24 may be altered using a node sort-on selector (not shown) similar to the link sort-on selector 38. This node sort-on selector would allow the user of the graphical user interface 22 to select a node attribute used to determine the position of each of the node lines 26, using a pull-down menu associated with the node sort-on selector. Some node attributes on which the node lines 26 may be ordered include alphabetical, geographic location, technology used by the node, status of the node, and traffic load on the node. Of course, other node attributes may be used for sorting the nodes. In the illustrated example in Figure 6, the option of the node sort-on selector is not illustrated. Instead, the node attribute upon which the horizontal position of the node lines 26 is determined has been predetermined as alphabetical, such that the node lines 26 and their associated node indicia 24 are horizontally ordered according to the alphabetical order of the

names of the nodes they represent.

Optionally, the node lines 26 may be horizontally positioned into groups comprising node lines 26 representing nodes having similar node attributes. Such an option may be
5 selected, for example by selecting the option on a pop-up menu (not shown) which is displayed when the user right-clicks on a mouse. Alternatively, the graphical user interface 22 may group the node lines by default. The node attribute used to place the node lines 26 into groups may be selected using the
10 node sort-on selector (as discussed above).

In Figure 6c, the user has selected for the nodes to be displayed in groups. The node groupings 54 have been identified by placing a box around the node indicia 24 associated with the node lines 26 of each node grouping 54, and
15 have also been separated from one another spatially. Of course, other means may be used to identify node groupings 54, background shading, for example. Additionally, each node grouping 54 may be identified by displaying an alphanumeric identification associated with each node grouping 54 (not
20 shown).

Optionally, a node grouping 54 may be compressed by the user. In Figure 6d, a particular node grouping 55 appearing in Figure 6c has been selected, for example by the user positioning a mouse pointer (not shown) over the node
25 grouping and clicking the right mouse button, which may cause a pop-up menu (not shown) to appear allowing the user to select "compress" (this option may not be available with respect to all node groupings 54, in which case the "compress" option in the pop-up menu will appear in ghosting instead of in solid
30 lettering). As a result, the node grouping 55 has been compressed to a single compressed node indicia 56, with a single associated node line 57. This compressed node indicia 56 is visually distinguished from the others, in this case by

shading the background behind the compressed node indicia. Alternatively, the compressed node indicia 56 may be visually distinguished from the others by displaying the node indicia using a distinctive icon or a distinctive colour (not shown).

5 Such node groupings 54 may be compressed, for example to represent a number of nodes at a single geographic location, as a single node. Selecting the compressed node indicia 56 expands the compressed node indicia to the node grouping 55 of Figure 6c. This may be effected, for example, by the user
10 positioning a mouse pointer (not shown) over the compressed node indicia 56 and clicking the right mouse button, which may cause a pop-up menu (not shown) to appear allowing the user to select "expand".

Within each node grouping 54, the node lines 26 may
15 be ordered based on the node attribute upon which the node groupings 54 are based. For example, (not illustrated) if the node attribute upon which the node groupings are based is first letter of the name of the node, the node lines 26 are grouped according to the first letter of the name of the nodes they
20 represent. Thus, one node grouping 54 may contain those node lines 26 and associated node indicia 24 representing nodes having names beginning with the letter "A", and the next node grouping 54 may contain those node lines 26 and associated node indicia 24 representing nodes having names beginning with the
25 letter "B". In such a case, within each node grouping 54 the node lines will be ordered according to the alphabetical order of the names of the nodes they represent.

Furthermore, within each node grouping 54, the node lines 26 may be horizontally positioned based on a secondary
30 node attribute. Such secondary node attribute may be selected using another pull-down menu (not shown), for example, or may be predetermined. Thus, if for example, the node attribute upon which the node groupings 54 are based is node technology, the node lines 26 will be horizontally positioned into node

groupings 54 consisting of node lines 26 representing nodes having similar node technology. Then, if the secondary node attribute upon which the horizontal position of the node lines 26 is determined is traffic load, those node lines 26 comprising each node grouping 54 will be horizontally ordered according to the traffic load of the nodes they represent.

The date/time for which all of the information is displayed in the graphical user interface 22 is selected by moving a slide tab 40 along a time bar 42. In this case, the time bar represents the period from June 25, 2000 44 to August 10, 2000 46, and the date/time selected for displaying information is July 7, 2000 at noon 48. Moving the slide tab 40 to a different location on the time bar 42 automatically updates the information displayed in the graphical user interface 22 to that as of the time/date corresponding with the location of the slide tab 40.

Alternatively, the graphical user interface 22 may display data in real time such that the information displayed is updated continuously.

In the case of links which are temporal in nature, the links to be represented may be determined by the period represented on the time bar 42. For example, the graphical user interface 22 may represent only these links over which data actually travelled during the time period indicated on the time bar.

Figure 8 is a flow chart describing the basic functionality of the graphical user interface 22 when display criteria are changed by the user. Upon receipt 50 of display criteria from the user, for example, the time for which data is to be displayed, the link attribute upon which the links are to be sorted or grouped, and the performance characteristic to be displayed by the performance bars 34, the node and link data 10

is processed 54 to determine, for example, the order of the link lines 28 to be displayed, the shading or hatching to be used for each link line, and the length of the performance bar 34 to be displayed in association with each link line. The data is then displayed 56.

Although a detailed description of the appearance and functionality of a preferred embodiment graphical user interface according to the present invention has been provided, it will be understood by a person skilled in the art that variations may be made to both the appearance and the functionality without departing from the scope of the present invention.

Further, although the present invention has been discussed as being applicable in the transportation and telecommunication industries, it is to be understood that the connected graph and graphical user interface of the present invention may be utilized to display nodes and links in other applications, the electronics field for example, to display connections between electronic components, in distribution network applications, such as oil, gas or water distribution systems, to display piping connections between pumping stations, or in software development applications to display connections between class objects for an object-oriented computer program.

Additionally, although the method and connected graph of the present invention has been described as being dynamically represented on a computer system, it is to be understood that it may also be statically represented on a computer, or on printed media, on a poster, an overhead transparency or in a report, book or pamphlet, for example.

Numerous modifications and variations of the present invention are possible in light of the above teachings. It is

therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described herein.

12414ROUS01U

CLAIMS:

1. A method for displaying representations of nodes, and links connecting said nodes, said method comprising:

displaying a node line representing each one of said
5 nodes, each node line being parallel to every other node line;
and

displaying a link line representing each one of said
links, each link line being perpendicular to each node line,

wherein each link line terminates at two node lines,
10 said two node lines representing the nodes connected by the
link represented by the link line.

2. The method of claim 1 wherein each link line is
displayed in a manner which visually communicates a link
attribute of the link it represents.

15 3. The method of claim 2 wherein the link attribute is
communicated by displaying the link line in a distinctive
colour.

4. The method of claim 2 wherein the link attribute of
the link is communicated by displaying the link line as a
20 patterned line.

5. The method of claim 1 wherein each link line is
displayed in a manner which visually communicates a plurality
of link attributes of the link it represents.

6. The method of claim 1 wherein the method is practised
25 in a computer system, the method further comprising:

displaying a plurality of link attribute identifiers
for each of which there is an associated link attribute for
each link;

providing a selection input mechanism for selection of a selected one of said link attribute identifiers;

wherein upon selection of said selected one of said link attribute identifiers, each link line is displayed in a position relative to every other link line, determined by a comparison of the link attribute associated with the said selected one of said link attribute identifiers, for the link represented by the link line, with the link attribute associated with the said selected one of said link attribute identifiers, for every other link.

7. The method of claim 1 wherein the method is practised in a computer system, and wherein the nodes and links are in a telecommunication system.

8. The method of claim 7 wherein each link line is displayed in a manner which visually communicates a link attribute of the link it represents.

9. The method of claim 8 wherein the link attribute is a relative traffic level on the link.

10. The method of claim 9 wherein the relative traffic level on the link is communicated by displaying a link line whose thickness is a function of the relative traffic level on the link.

11. The method of claim 8 wherein the link attribute is a direction of travel of data on the link.

12. The method of claim 11 wherein the direction of travel of data on the link is communicated by displaying an arrowhead at one end of the link line.

13. The method of claim 8 wherein the link attribute is a geographic location of said link.

14. The method of claim 8 wherein the link attribute is a performance characteristic of said link.

15. The method of claim 8 wherein the link attribute is a
5 status of said link.

16. The method of claim 8 wherein the link attribute of the link is visually communicated by displaying the link line in a distinctive colour.

17. The method of claim 8 wherein the link attribute of
10 the link is visually communicated by displaying the link line as a patterned line.

18. The method of claim 7 wherein each link line is displayed in a manner which visually communicates a plurality of link attributes of the link it represents.

15 19. The method of claim 7 further comprising:

displaying a plurality of link attribute identifiers for each of which there is an associated link attribute for each link;

20 providing a selection input mechanism for selection of a selected one of said link attribute identifiers;

wherein a first link attribute is the link attribute associated with the said selected one of said link attribute identifiers, and upon selection of said selected one of said link attribute identifiers, each link line is displayed in a
25 position relative to every other link line, determined by a comparison of the first link attribute of the link represented by the link line, with the first link attribute of every other link.

20. The method of claim 19 wherein said plurality of link attribute identifiers is displayed in a pull-down menu.

21. The method of claim 19 wherein one of said plurality of link attribute identifiers is start node, and upon selection
5 of the start node link attribute identifier and upon selection of a selected node line, those link lines representing links which start at the node represented by the selected node line, are displayed in priority to one another.

10 22. The method of claim 19 wherein one of said plurality of link attribute identifiers is end node, and upon selection of the end node link attribute identifier and upon selection of a selected node line, those link lines representing links which end at the node represented by the selected node line, are displayed in proximity to one another.

15 23. The method of claim 19 wherein one of said plurality of link attribute identifiers is performance characteristic, and upon selection of the performance characteristic link attribute identifier, each link line is displayed in order according to a value of a performance characteristic of the
20 link represented by the link line.

24. The method of claim 19 wherein link lines representing links having similar first link attributes are displayed in proximity to each other, to form a link grouping.

25. The method of claim 24 wherein each link grouping is
25 visually identified.

26. The method of claim 25 wherein each link grouping is visually identified by displaying a rectangle surrounding each link grouping.

27. The method of claim 25 wherein each link grouping is
30 displayed spatially separated from an adjacent link grouping.

28. The method of claim 24 wherein each link line within each link grouping is displayed in a position relative to every other link line in the link grouping, determined by a comparison of the first link attribute of the link represented by the link line, with the first link attribute of the link represented by every other link line in the link grouping.

29. The method of claim 24 further comprising:

displaying an option to compress a link grouping; and

upon selection of a link grouping, and selection of the option to compress a link grouping, erasing the link grouping and displaying a single compressed link line representing all of the links represented by the link lines comprising the link grouping, said compressed link line being perpendicular to the node lines, and terminating at the two node lines representing the two nodes connected by the links represented by the link lines comprising the link grouping.

30. The method of claim 29 wherein the step of displaying an option to compress a link grouping is performed by, upon selection of a link grouping, displaying a pop-up menu displaying an option to compress the link grouping.

31. The method of claim 29 wherein said compressed link line is visually distinguished from each of the other link lines.

32. The method of claim 29 further comprising:

displaying an option to expand a compressed link line; and

upon selection of a compressed link line, and selection of the option to expand a compressed link line, erasing the compressed link line and displaying a link grouping comprised of link lines representing links represented by the

compressed link line.

33. The method of claim 32 wherein the step of displaying an option to expand a compressed link line is performed by, upon selection of a compressed link line, displaying a pop-up
5 menu displaying an option to expand the link grouping.

34. The method of claim 24 wherein each link line within a link grouping is displayed in a position relative to every other link line in the link grouping, determined by a comparison of a second link attribute of the link represented
10 by the link line, with the second link attribute of the link represented by every other link line in the link grouping.

35. The method of claim 8 further comprising:

displaying a plurality of link attribute identifiers for each of which there is an associated link attribute for
15 each link;

providing a selection input mechanism for selection of a selected one of said link attribute identifiers;

wherein a first link attribute is the link attribute associated with the said selected one of said link attribute
20 identifiers, and upon selection of said selected one of said link attribute identifiers, each link line is displayed in a position relative to every other link line, determined by a comparison of the first link attribute of the link represented by the link line, with the first link attribute of every other
25 link.

36. The method of claim 7 further comprising:

providing a selection input mechanism for selection of a selected plurality of said link lines;

displaying said selected plurality of said link lines in proximity to each other to form a link grouping.

37. The method of claim 36 further comprising:

displaying an option to compress a link grouping; and

5 upon selection of a link grouping, and selection of the option to compress a link grouping, erasing the link grouping and displaying a single compressed link line representing all of the links represented by the link lines comprising the link grouping, said compressed link line being
10 perpendicular to the node lines, and terminating at the two node lines representing the two nodes connected by the links represented by the link lines comprising the link grouping.

38. The method of claim 37 further comprising:

displaying an option to expand a compressed link line; and

15 upon selection of a compressed link line, and selection of the option to expand a compressed link line, erasing the compressed link line and displaying a link grouping comprised of link lines representing links represented by the compressed link line.

20 39. The method of claim 7 further comprising:

displaying a plurality of node attribute identifiers for each of which there is an associated node attribute for each node;

25 providing a selection input mechanism for selection of a selected one of said node attribute identifiers;

wherein a first node attribute is the node attribute associated with the said selected one of said node attribute identifiers, and upon selection of said selected one of said

node attribute identifiers, each node line is displayed in a position relative to every other node line, determined by a comparison of the first node attribute of the node represented by the node line, with the first node attribute of every other
5 node.

40. The method of claim 39 further comprising displaying in association with each node line, a node indicia identifying the node represented by the node line.

41. The method of claim 39 wherein said plurality of node
10 attribute identifiers is displayed in a pull-down menu.

42. The method of claim 40 wherein node lines representing nodes having a similar first node attribute are displayed in proximity to each other, to form a node grouping.

43. The method of claim 42 wherein each node grouping is
15 visually identified.

44. The method of claim 43 wherein each node grouping is visually identified by displaying a rectangle surrounding the node indicia associated with the node lines of each node grouping.

20 45. The method of claim 43 wherein each node grouping is displayed spatially separated from an adjacent node grouping.

46. The method of claim 43 wherein each node line within each node grouping is displayed in a position relative to every other node line in the node grouping, determined by a
25 comparison of the first node attribute of the node line with the first node attribute of the nodes represented by the other node lines in the node grouping.

47. The method of claim 42 further comprising:
displaying an option to compress a node grouping; and

upon selection of a node grouping, and selection of the option to compress a node grouping, erasing the node grouping and displaying a single compressed node line representing all of the nodes represented by the node lines comprising the node grouping.

48. The method of claim 47 wherein the step of displaying an option to compress a node grouping is performed by, upon selection of a node grouping, displaying a pop-up menu displaying an option to compress the node grouping.

49. The method of claim 47 wherein said compressed node line is visually distinguished from each of the other node lines.

50. The method of claim 47 further comprising:

displaying an option to expand a compressed node line; and

upon selection of a compressed node line, and selection of the option to expand a compressed node line, erasing the compressed node line and displaying a node grouping comprised of node lines representing nodes represented by the compressed node line.

51. The method of claim 50 wherein the step of displaying an option to expand a compressed node line is performed by, upon selection of a compressed node line, displaying a pop-up menu displaying an option to expand the node grouping.

52. The method of claim 42 wherein each node line within a node grouping is displayed in a position relative to every other node line in the node grouping, determined by a comparison of a second node attribute of the node represented by the node line, with the second node attribute of the node represented by every other node line in the node grouping.

53. The method of claim 8 further comprising:

displaying a plurality of node attribute identifiers
for each of which there is an associated node attribute for
5 each node;

providing a selection input mechanism for selection
of a selected one of said node attribute identifiers;

wherein a first node attribute is the node attribute
associated with the said selected one of said node attribute
10 identifiers, and upon selection of said selected one of said
node attribute identifiers, each node line is displayed in a
position relative to every other node line, determined by a
comparison of the first node attribute of the node represented
by the node line, with the first node attribute of every other
15 node.

54. The method of claim 7 further comprising:

providing a selection input mechanism for selection
of a selected plurality of said node lines;

displaying said selected plurality of said node lines
20 in proximity to each other to form a node grouping.

55. The method of claim 54 further comprising:

displaying an option to compress a node grouping; and

upon selection of a node grouping, and selection of
the option to compress a node grouping, erasing the node
25 grouping and displaying a single compressed node line
representing all of the nodes represented by the node lines
comprising the node grouping.

56. The method of claim 55 further comprising:

displaying an option to expand a compressed node line; and

upon selection of a compressed node line, and
5 selection of the option to expand a compressed node line,
erasing the compressed node line and displaying a node grouping
comprised of node lines representing nodes represented by the
compressed node line.

57. The method of claim 7 further comprising:

10 displaying, in association with each link line, a bar
whose length is a function of a value of a characteristic of
the link represented by the link line.

58. The method of claim 57 further comprising:

15 displaying a plurality of performance characteristics
identifiers for each of which there is an associated
performance characteristic value for each link;

providing a selection input mechanism for selection
of a selected one of said performance characteristic
identifiers;

20 wherein upon selection of said selected one of said
performance characteristic identifiers, each bar is displayed
having a length which is a function of the performance
characteristic value associated with the said selected one of
said performance characteristic identifiers, for the link
25 represented by the link line with which the performance bar is
associated.

59. The method of claim 52 wherein said plurality of
performance characteristic identifiers is displayed in a pull-
down menu.

60. The method of claim 7 further comprising:

providing a selection input mechanism for selection of a selected plurality of said link lines;

5 displaying said selected plurality of said link lines in proximity to each other to form a link grouping.

61. The method of claim 19 further comprising:

displaying, in association with each link line, a bar whose length is a function of a value of a characteristic of the link represented by the link line.

10 62. The method of claim 53 further comprising:

displaying, in association with each link line, a bar whose length is a function of a value of a characteristic of the link represented by the link line.

63. The method of claim 8 further comprising:

15 displaying a time selector, wherein upon selection of a time on said time selector, each link line is displayed in a manner which visually communicates a link attribute of the link it represents, as of the selected time.

20 64. The method of claim 63 wherein said time selector is a slide tab on a time bar, wherein the time is selected by moving the slide tab to a location on the time bar corresponding with the time to be selected.

65. The method of claim 19 further comprising:

25 displaying a time selector, wherein upon selection of a time on said time selector, each link line is displayed in a position relative to every other link line, determined by a comparison of the link attribute associated with the said selected one of said link attribute identifiers, for the link

represented by the link line, with the link attribute associated with the said selected one of said link attribute identifiers, for every other link, as of the selected time.

66. The method of claim 65 wherein said time selector is
5 a slide tab on a time bar, wherein the time is selected by moving the slide tab to a location on the time bar corresponding with the time to be selected.

67. The method of claim 57 further comprising:

10 displaying a time selector, wherein upon selection of a time on said time selector, each bar is displayed having a length which is a function of a value of a characteristic of the link represented by the link line associated with it, as of the selected time.

68. The method of claim 67 wherein said time selector is
15 a slide tab on a time bar, wherein the time is selected by moving the slide tab to a location on the time bar corresponding with the time to be selected.

69. A computer system adapted to implement the method of claim 1.

20 70. A graphical user interface adapted to implement the method of claim 1.

71. A computer readable medium having stored thereon, instructions for instructing a computer to implement the method of claim 1.

25 72. A computer system adapted to implement the method of claim 7.

73. A graphical user interface adapted to implement the method of claim 7.

74. A computer readable medium having stored thereon,

instructions for instructing a computer to implement the method of claim 7.

75. A printed medium having printed thereon a visual representation of nodes, and links connecting said nodes, said
5 visual representation comprising:

a node line representing each one of said nodes, each node line being parallel to every other node line; and

a link line representing each one of said links, each link line being perpendicular to each node line,

10 wherein each link line terminates at two node lines, said two node lines representing the nodes connected by the link represented by the link line.

ABSTRACT

The present invention relates to an improved method of displaying nodes, and links between nodes. Instead of the conventional method of displaying nodes and links as points and lines respectively, in accordance with the present invention, the nodes are each represented by parallel node lines. The links are then represented by link lines drawn perpendicular to the node lines, each of said link lines terminating at the node lines representing the nodes connected by the link represented by the link line. A graphical user interface incorporating this improved method of displaying nodes and links is also contemplated.

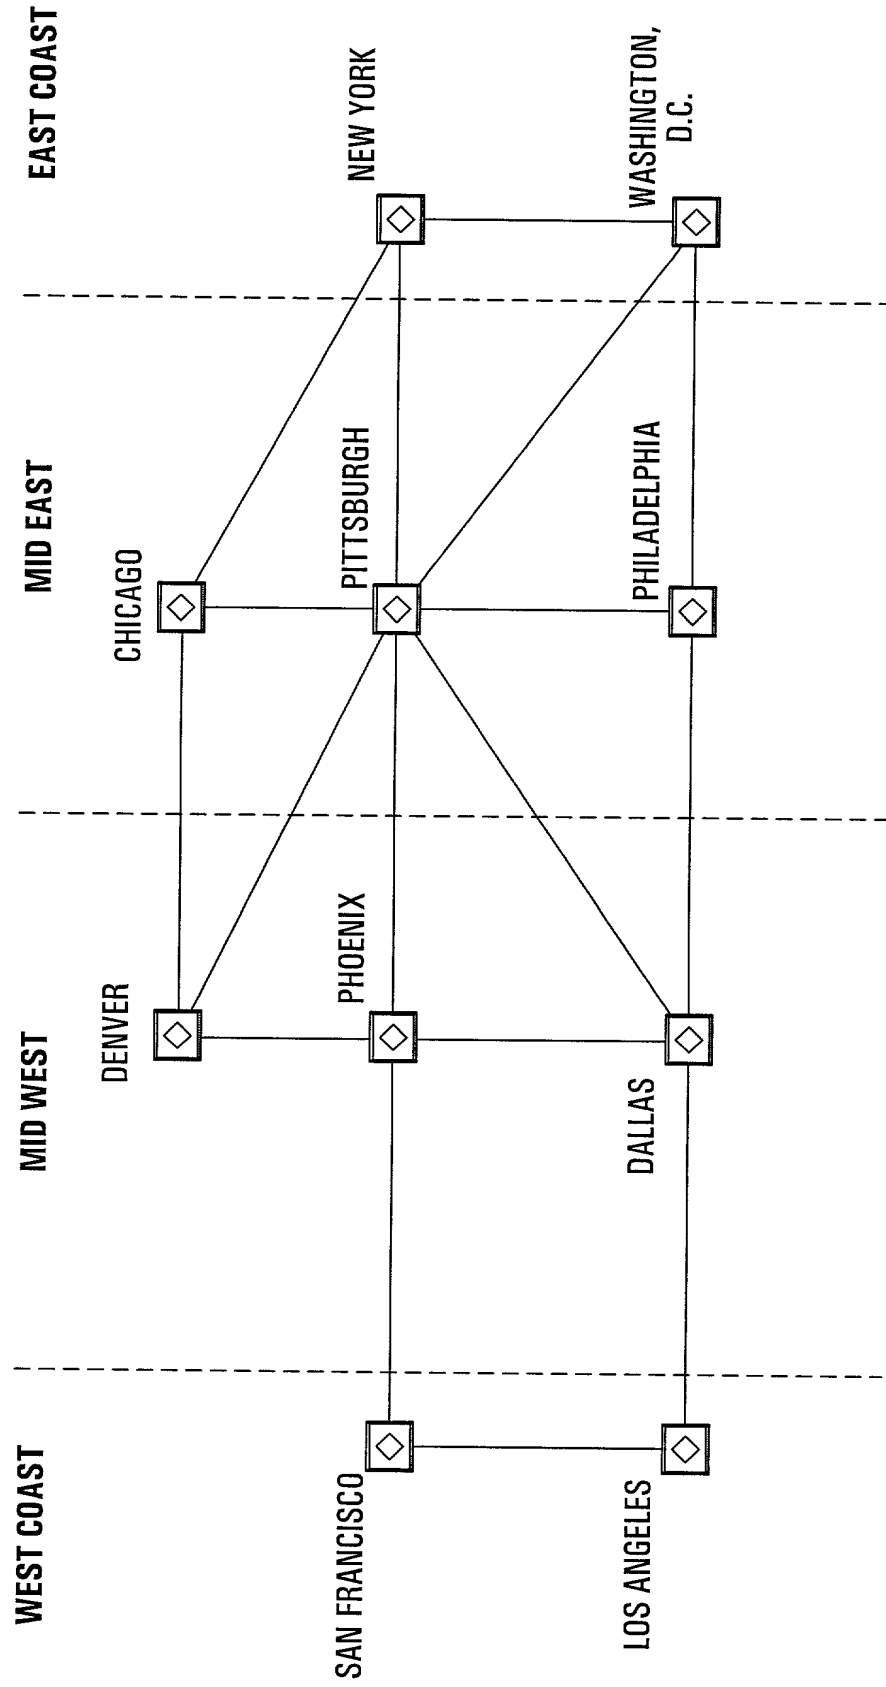


FIG. 1
PRIOR ART

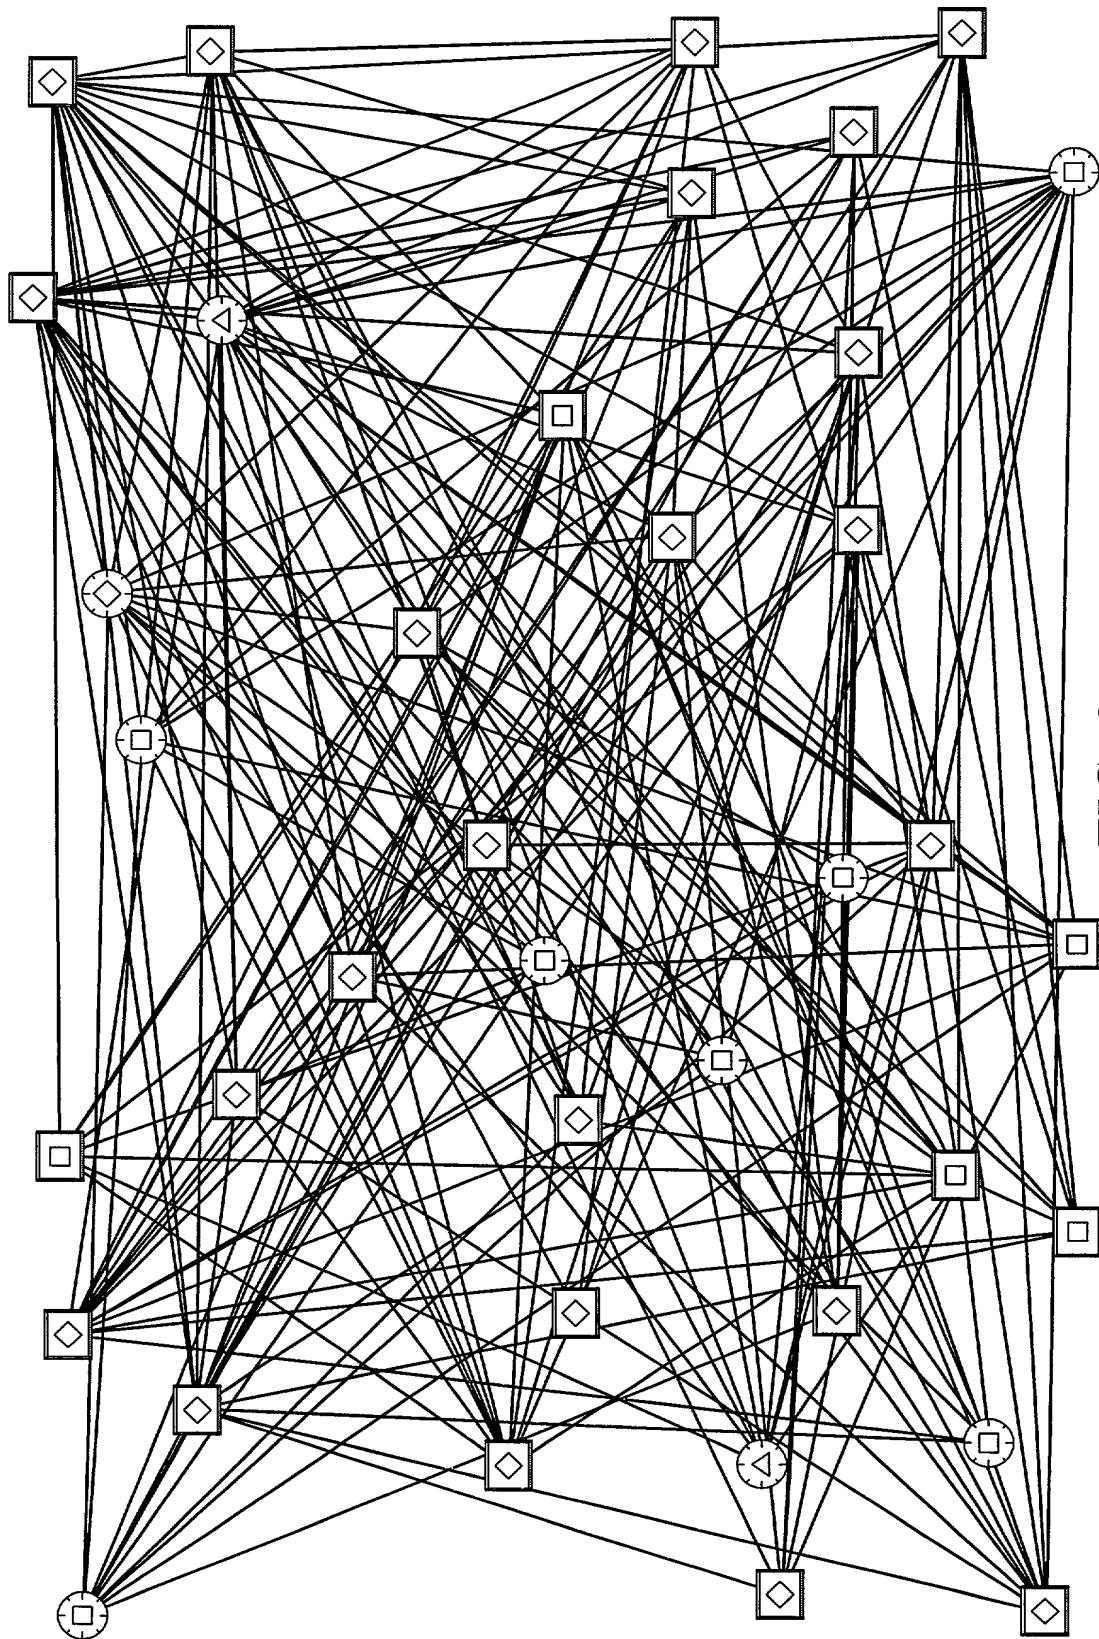


FIG. 2
PRIOR ART

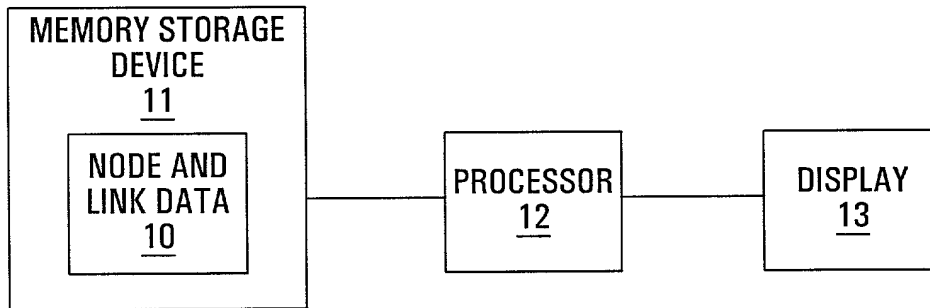


FIG. 3

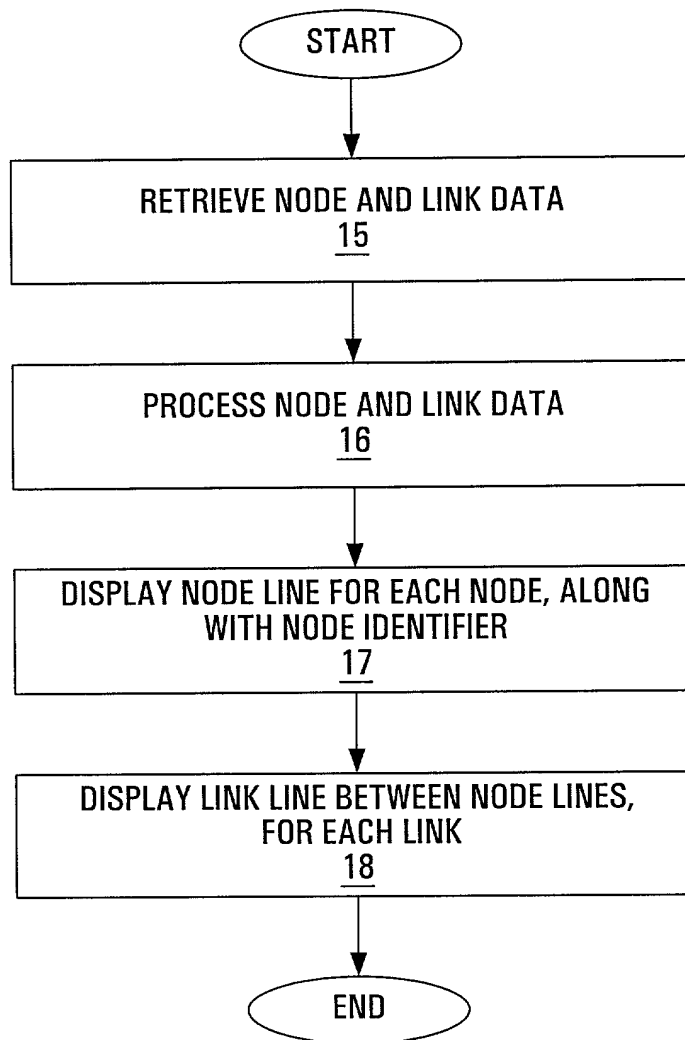


FIG. 4

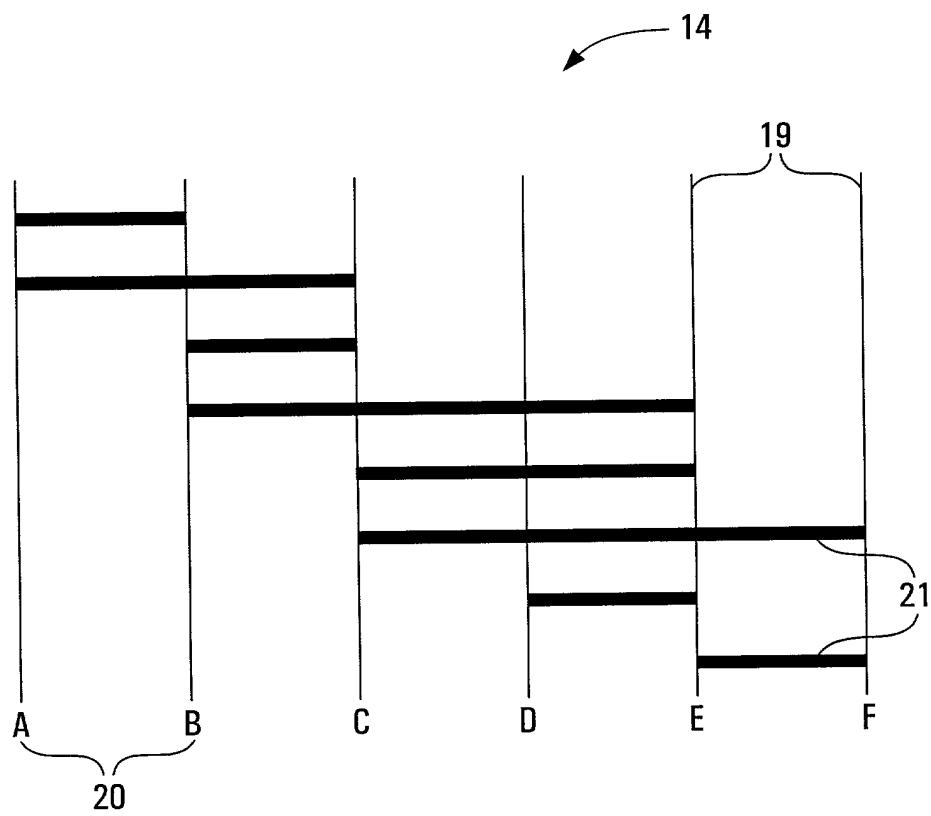


FIG. 5

FIG. 6 is a schematic diagram of a computer screen 22 displaying a performance chart 26. The chart 26 is a Gantt chart showing the performance of various tasks 28 over time. The tasks 28 are represented by horizontal bars of different patterns (solid black, white, diagonal lines, cross-hatch) on a grid. The vertical axis 24 represents time, with labels for JUNE 25/00, JULY 7/00 (NOON), and AUGUST 10/00. The horizontal axis 26 represents tasks, labeled with letters A through Z. A legend 34 at the bottom identifies the bar patterns. A control panel 36 at the top left includes a title bar 23, a 'PERFORMANCE' section with an 'ERROR RATE' dropdown, and a 'SORT ON:' section with a 'PERFORMANCE' dropdown. A date/time display 46 at the top right shows '5/11'.

22

5/11

32

23

ABC COMPANY CONTINENTAL U.S. INTRANET

38

SORT ON:

PERFORMANCE ▼

PERFORMANCE:

ERROR RATE ▼

28b

28a

28c

28d

28

26

34

24 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z AAABACAD

JUNE 25/00

JULY 7/00
(NOON)

AUGUST 10/00

44

48

30


46

FIG. 6


FIG. 6A is a screenshot of a web browser displaying a performance report for the ABC Company Continental U.S. Intranet. The report shows a grid of data for various states (Washington, Oregon, Idaho, Montana, California) across a range of dates (June 25/00 to August 10/00). The grid is sorted by link region. The report also includes a performance section with an error rate and a sort on option.

22

23

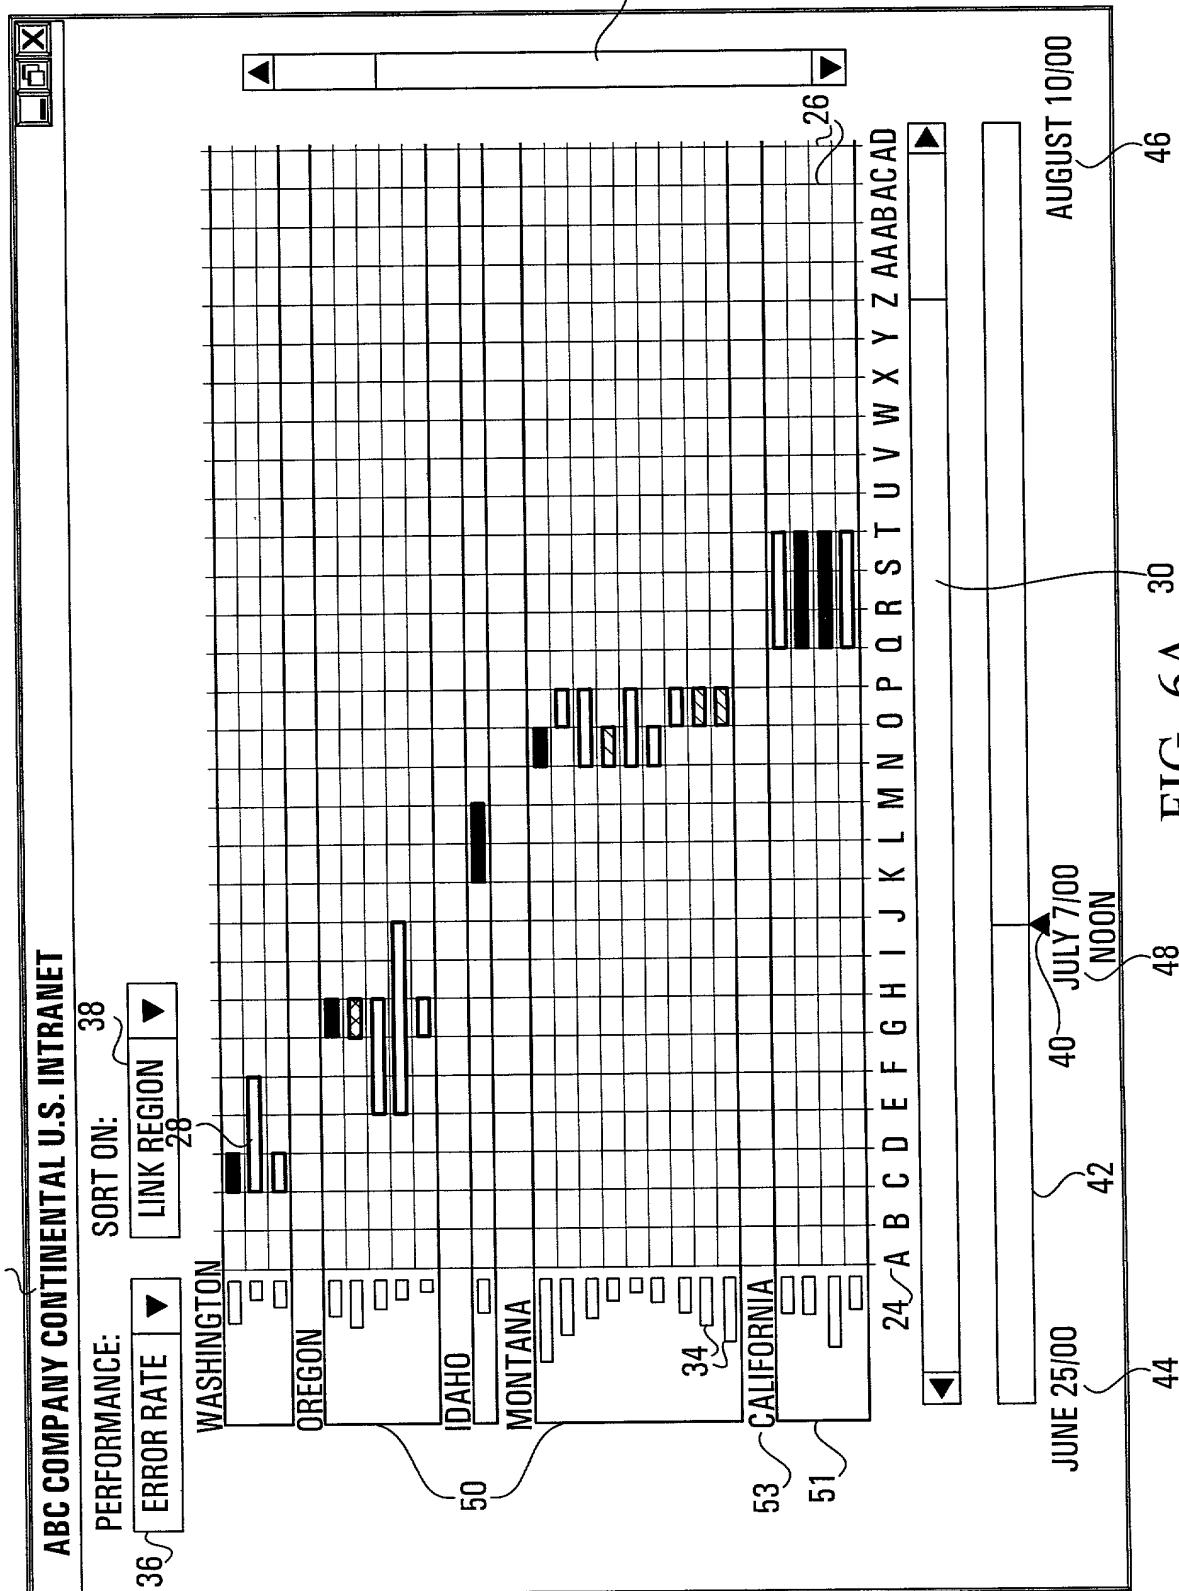

6/11



22

8/11

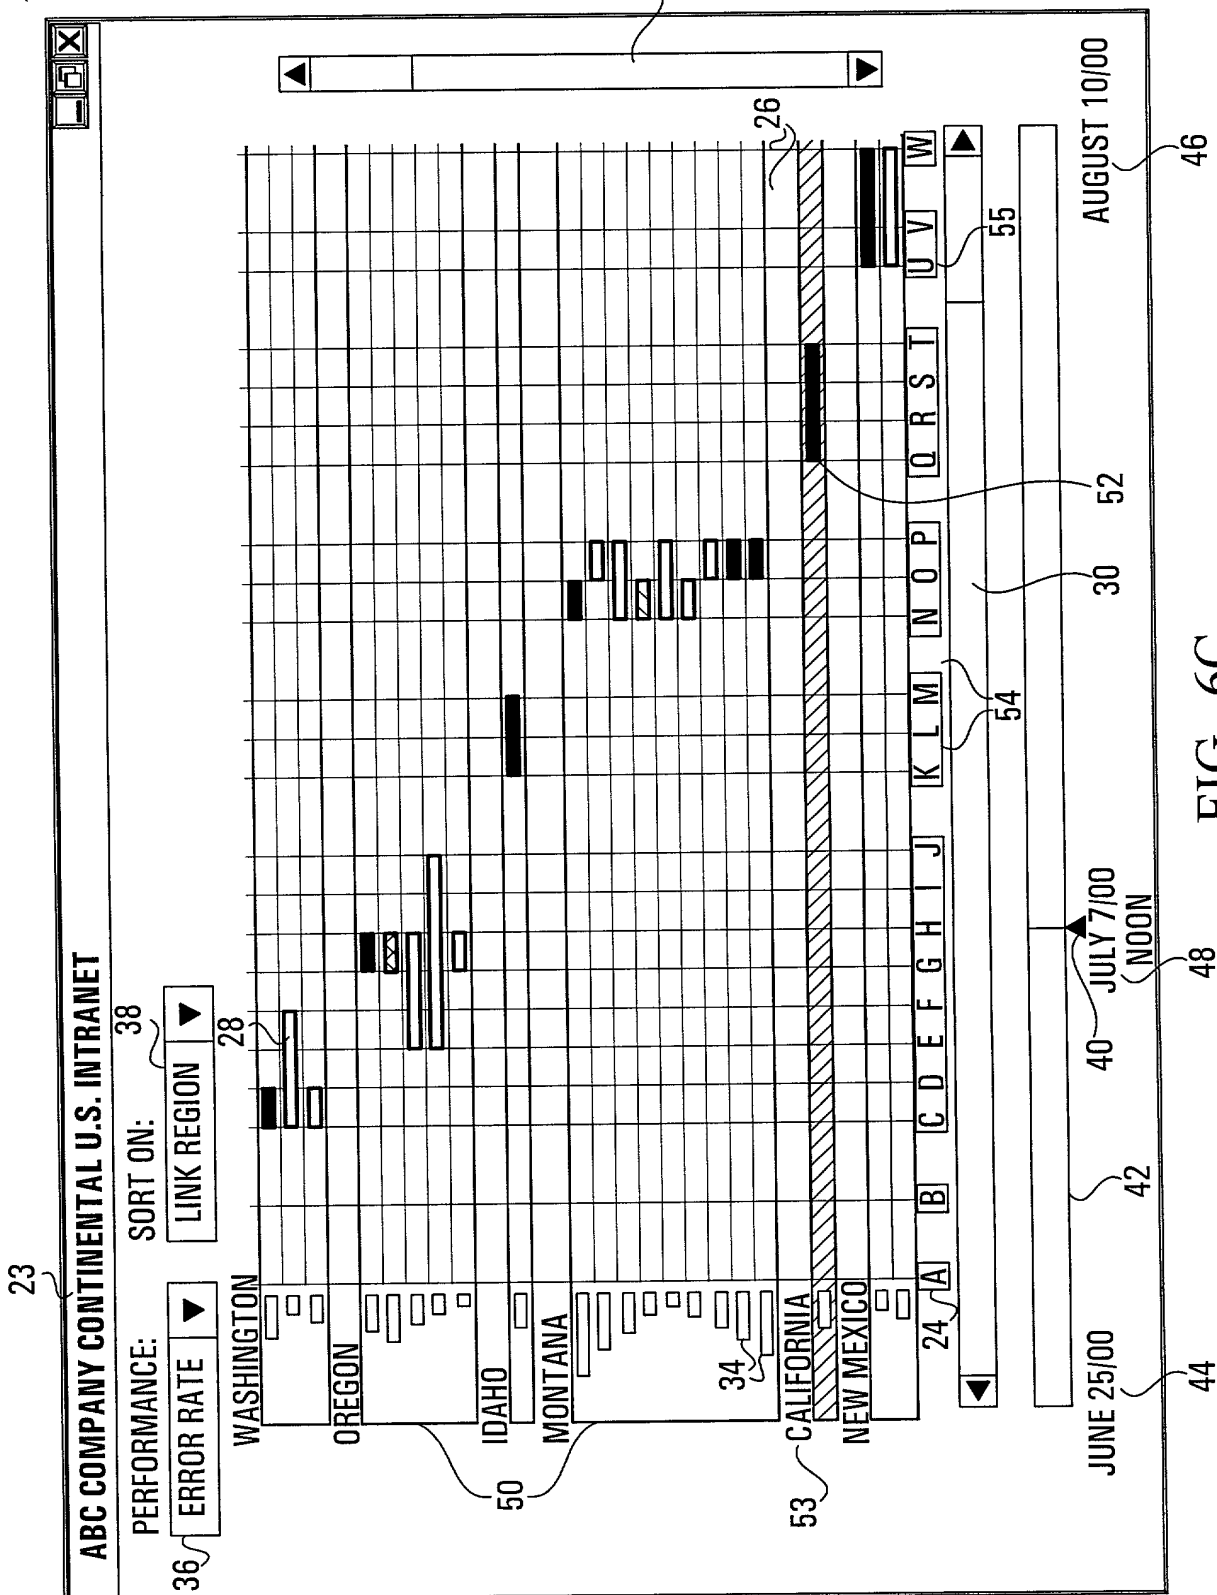


FIG. 6C

9/11

22

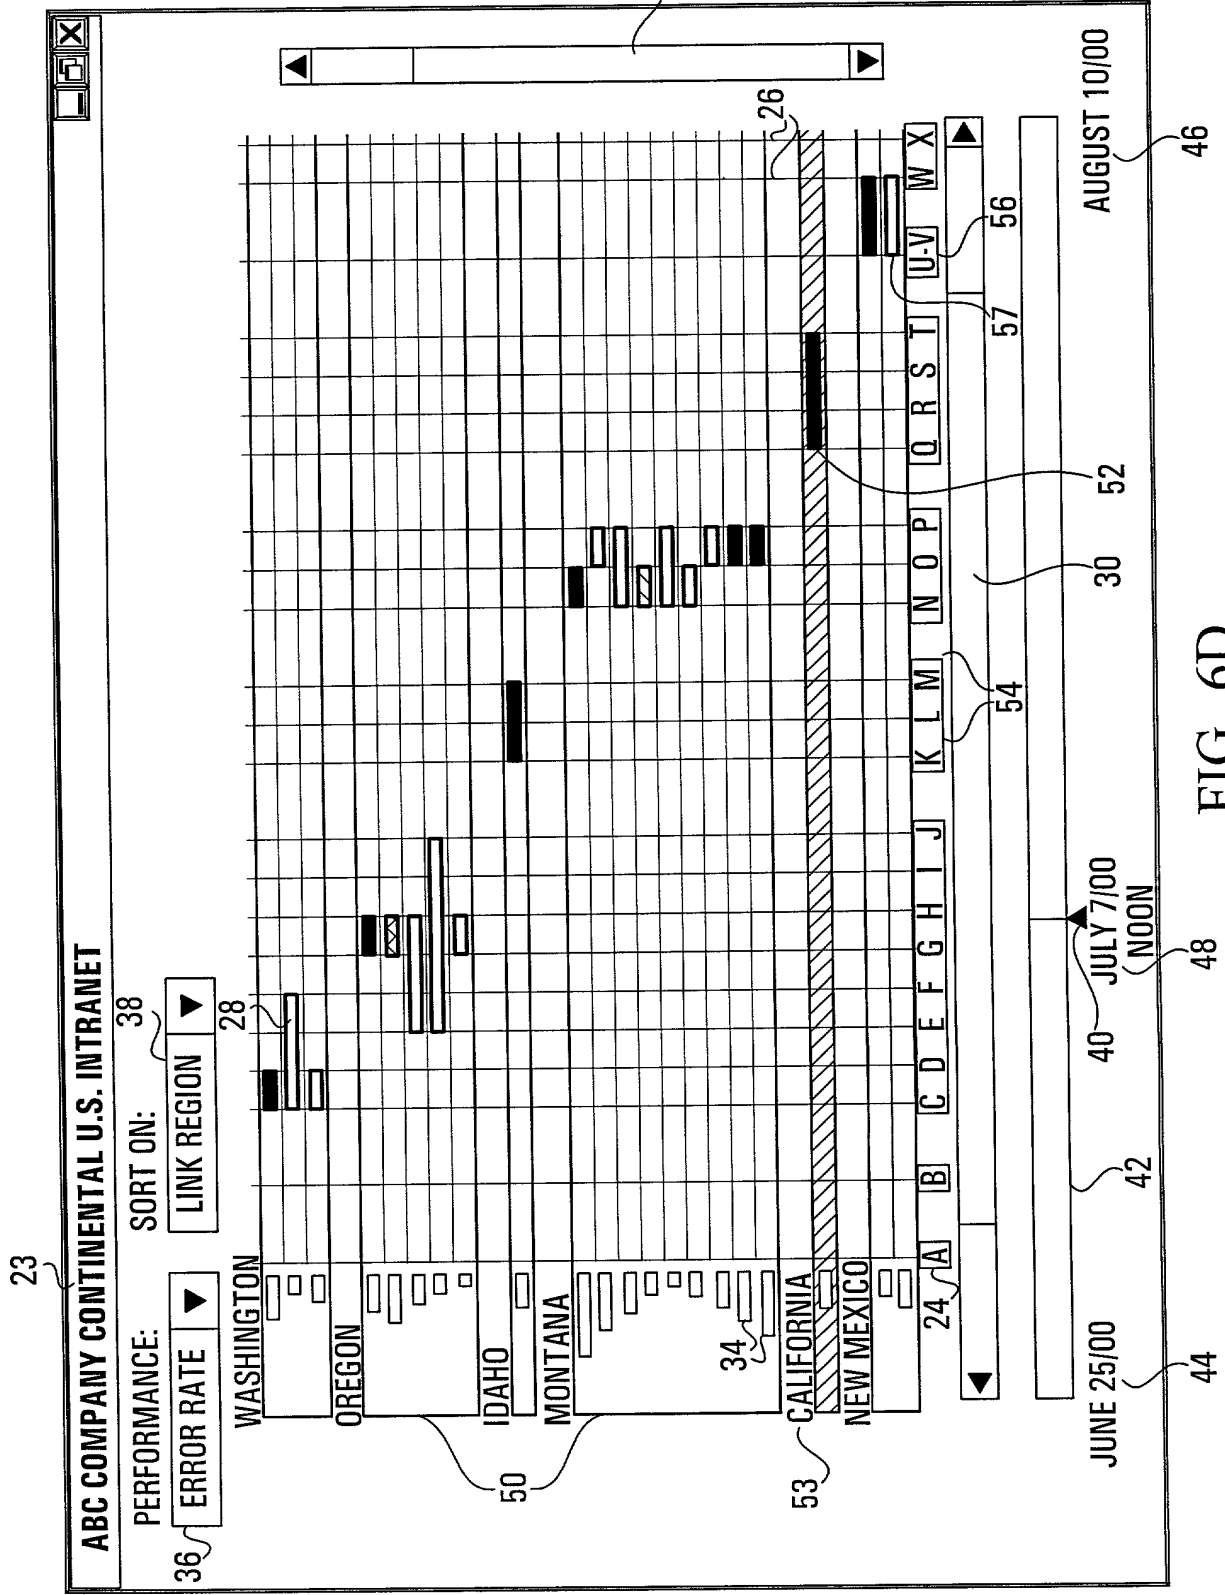


FIG. 6D

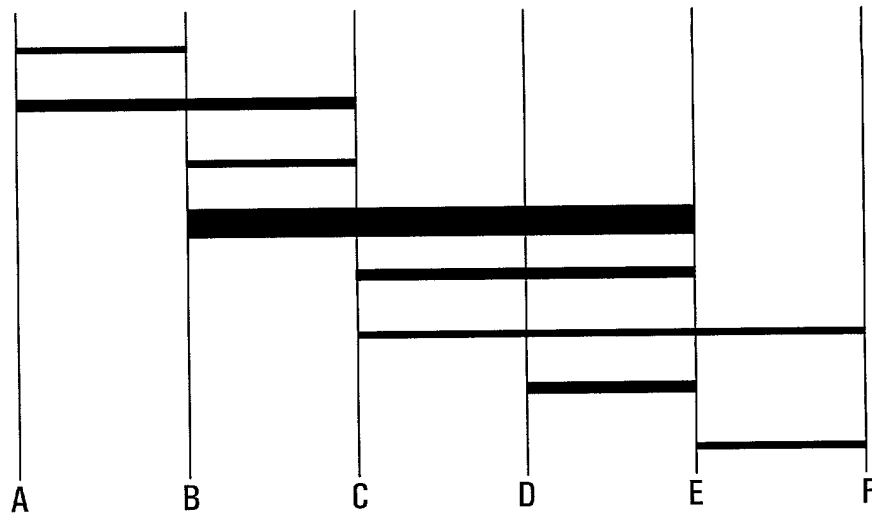


FIG. 7A

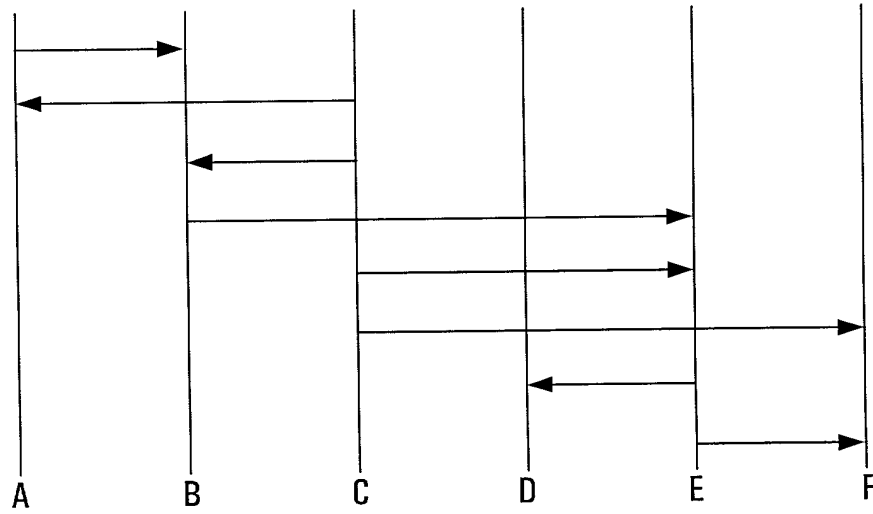


FIG. 7B

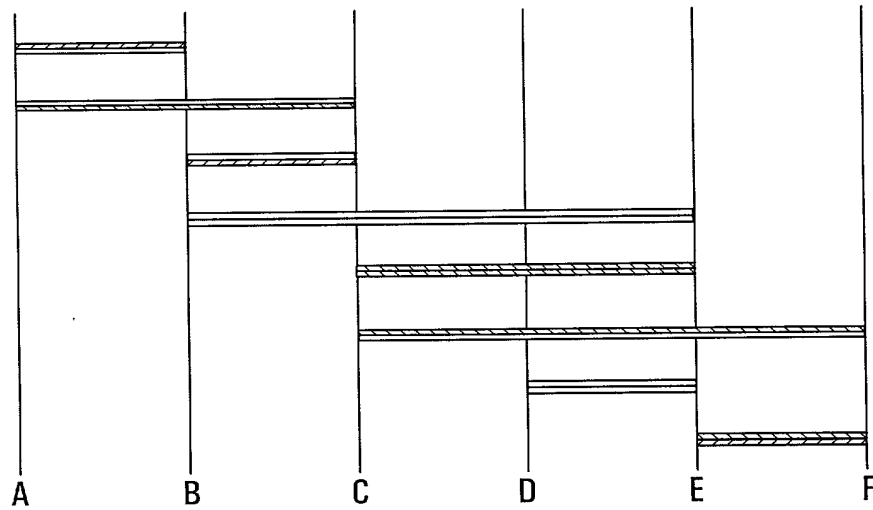


FIG. 7C

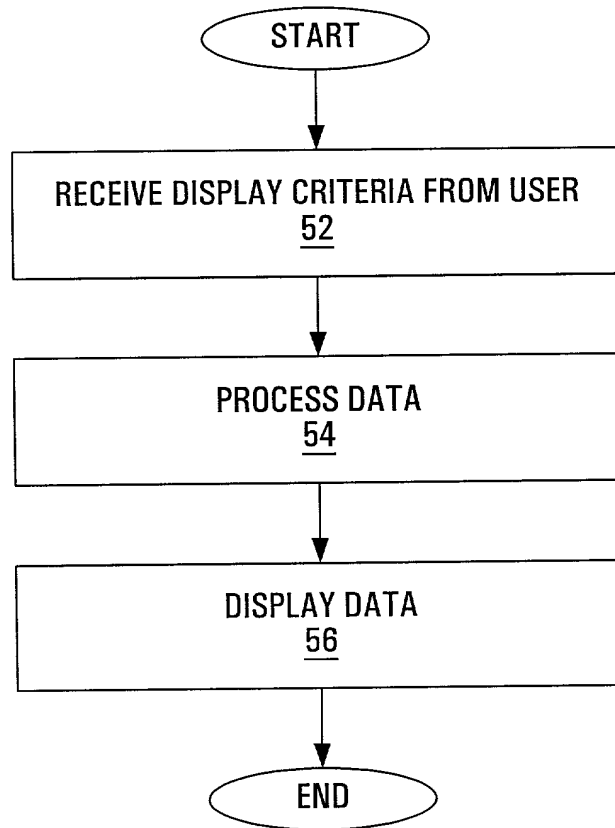


FIG. 8

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF DISPLAYING NODES AND LINKS

the specification of which

(check one) ☒ is attached hereto.

☐ was filed on _____
as U.S. Application Serial No. _____

☐ was filed on _____
as PCT International Application No. _____

and (if applicable) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §§1.56(a) and (b), which state:

- "(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:
- (1) prior art cited in search reports of a foreign patent office in a counterpart application,
 - (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.
- (b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability."

I hereby claim foreign priority benefits under 35 United States Code, §119 and/or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing of this application:

PRIOR FOREIGN APPLICATION(S)

<u>Number</u>	<u>Country</u>	<u>Filing Date</u> <i>(Month/Day/Year)</i>	<u>Date First</u> <u>Laid-open or</u> <u>Published</u>	<u>Date Patented</u> <u>or Granted</u>	<u>Priority Claimed?</u>
---------------	----------------	---	--	---	--------------------------

I hereby claim the benefit under 35 United States Code, §119(e) of any United States provisional application(s) listed below:

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR U.S. OR PCT APPLICATION(S)

<u>Application No.</u>	<u>Filing Date</u> <i>(month/day/year)</i>	<u>Status</u> <i>(pending, abandoned, granted)</i>
------------------------	---	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following patent agents with full power of substitution, association and revocation to prosecute this application and/or international application and to transact all business in the Patent and Trademark Office connected therewith:

JAMES D. KOKONIS (Reg. No. 21178)
ALAN R. CAMPBELL (Reg. No. 26129)
NICHOLAS H. FYFE (Reg. No. 26134)
ROBERT D. GOULD (Reg. No. 27523)
THOMAS R. KELLY (Reg. No. 29244)
MICHAEL E. WHEELER (Reg. No. 29246)
DONALD F. PHENIX (Reg. No. 32528)
KOHJI SUZUKI (Reg. No. 44467)
YWE J. LOOPER (Reg. No. 43758)
CHRISTINE N. GENGE (Reg. No. 45405)

HUGH O'GORMAN (Reg. No. 26140)
R. ALLAN BRETT (Reg. No. 40476)
A. DAVID MORROW (Reg. No. 28816)
JAMES MCGRAW (Reg. No. 28168)
JOHN BOCHNOVIC (Reg. No. 29229)
JOY D. MORROW (Reg. No. 30911)
TOKUO HIRAMA (Reg. No. 32551)
PHILIP D. LAPIN (Reg. No. 44443)
R. JOHN HALEY (Reg. No. 29,502)
HANS KOENIG (Reg. No. 46474)

PLEASE SEND CORRESPONDENCE TO:

Customer No. 07380
SMART & BIGGAR
P.O. Box 2999, Station D
900-55 Metcalfe Street
Ottawa, Ontario
Canada K1P 5Y6
Tel: (613) 232-2486
Fax: (613) 232-8440

Inventor's Name:	Luc	Beaudoin
	(First)	(Family Name)

Country of Citizenship: CANADA

Residence: Gatineau, Quebec, Canada
(City, Province, Country)

Post Office Address: 24 Rue McElroy, Gatineau, Quebec, Canada J8R 2T8

[illegible]